


# OIL STOP/M

## OILY FOGS & FUMES

CARATTERISTICHE TECNICHE  
 CARACTERISTIQUES TECHNIQUES  
 TECHNICAL FEATURES  
 TECHNISCHE DATEN  
 CARACTERISTICAS TÉCNICAS

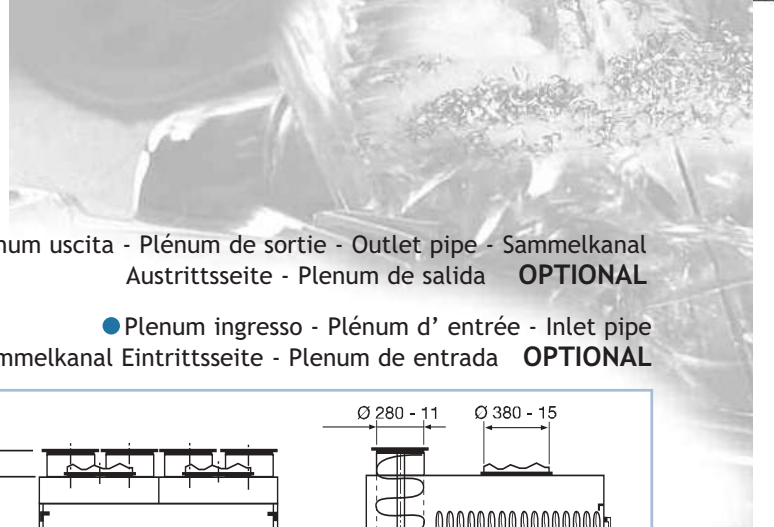


Versione senza ventilatore  
 Version sans ventilateur - Version without fan  
 Version ohne Ventilator - Versión sin ventilador



● Plenum uscita - Plénum de sortie - Outlet pipe - Sammelkanal  
 Austrittsseite - Plenum de salida **OPTIONAL**

● Plenum ingresso - Plénum d'entrée - Inlet pipe  
 Sammelkanal Eintrittsseite - Plenum de entrada **OPTIONAL**

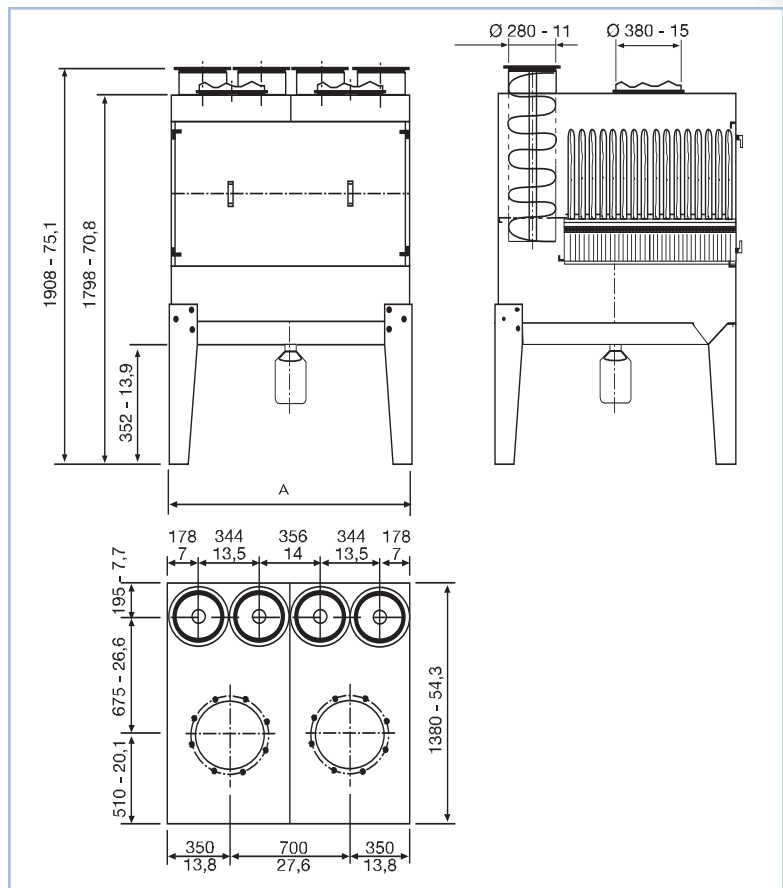

Dimensioni - Dimensions - Dimensions - Abmessungen - Medidas (mm-inch)

### OIL STOP / M

| Portata massima<br>Debit maxi<br>Max delivery<br>Max Luftmenge<br>Caudal max<br>m <sup>3</sup> /h - cfm | Efficienza di filtrazione<br>Efficacité de filtration<br>Filtering efficiency<br>Filtration Leistungsfähigkeit<br>Filtration Leistungsfähigkeit<br>% | Q.ta ingressi<br>N° entrée<br>N° inlets<br>Zahl der<br>Einblasstutzen<br>N° de entradas | Q.ta uscite<br>N° sorties<br>N° outlets<br>Zahl der<br>Ausblasstutzen<br>N° de salidas | Peso<br>Peso<br>Weight<br>Gewicht<br>Peso<br>Kg-Lbs | A<br>A |
|---|--|---|--|---|--------|
|---|--|---|--|---|--------|

|   |               |    |    |   |             |              |
|---|---------------|----|----|---|-------------|--------------|
| 2 | 8000 - 4720   | 99 | 4  | 2 | 400 - 880   | 1398 - 55    |
| 3 | 12000 - 7080  | 99 | 6  | 3 | 600 - 1320  | 2097 - 82,6  |
| 4 | 16000 - 9440  | 99 | 8  | 4 | 800 - 1760  | 2812 - 110,7 |
| 5 | 20000 - 11800 | 99 | 10 | 5 | 1000 - 2200 | 3511 - 138,2 |
| 6 | 24000 - 14160 | 99 | 12 | 6 | 1200 - 2640 | 4210 - 165,7 |